


GUARD CLEANER®

Stone

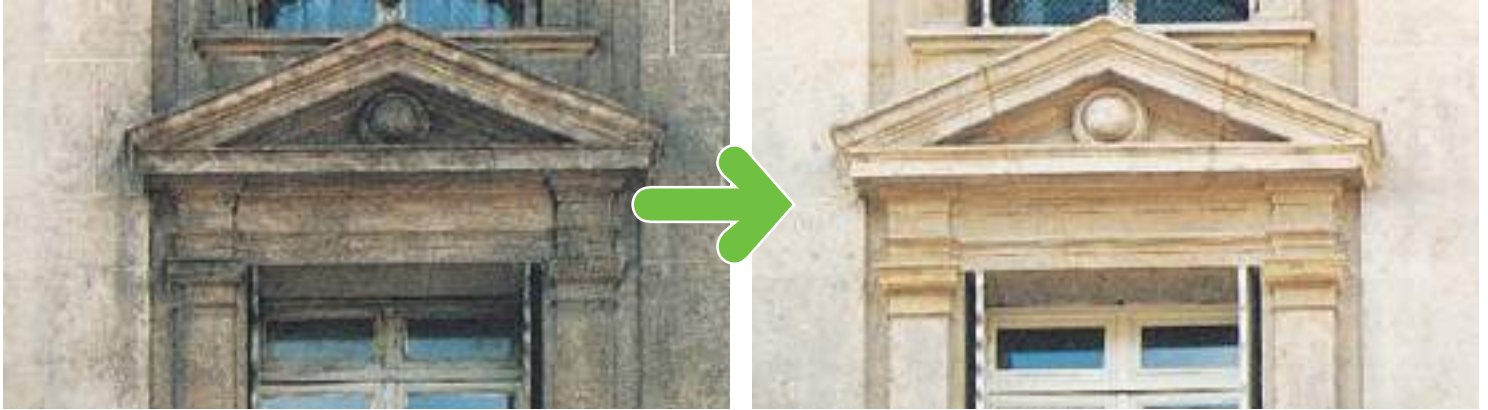

SOFT STONE BIODEGRADABLE CLEANER REMOVES DIRT FROM URBAN POLLUTION

DEEPLY CLEANS SURFACES SOILED BY ATMOSPHERIC POLLUTION

NON-TOXIC / NON-CORROSIVE

GEL FORMULA

IDEAL FOR SOFT STONE, RENDER...

PRODUCT DESCRIPTION

Guard Cleaner® Stone is an innovative product designed for the soft cleaning of facades soiled by atmospheric and urban pollution.

Composed of easily biodegradable and effective molecules, Guard Cleaner® Stone offers all the advantages of use in terms of ease of use, effectiveness and safety, unlike the corrosive products commonly used.

It does not alter the supports and surrounding materials (aluminium, PVC, glass) and does not require neutralisation after rinsing.

In the form of a homogeneous gel, Guard Cleaner® Stone can be applied very easily without sinking.

The conditions of application of the product must always be determined according to the nature and the degree of clogging as well as the nature and the porosity of the support.

USE

Ideal to clean exterior walls and facades. It can be applied to all types of substrates such as limestone, render, brick... For render finish preferably apply Guard Wash® Express.

ADVANTAGES AND CHARACTERISTICS

- Deeply cleans and decontaminates.
- Does not damage the surface.
- Can be used on a wide variety of surfaces.
- Ready to use: quick and easy to use.

ENVIRONMENT

Ecological and respects the environment:

- Water-based product.
- Safe and non-toxic.
- VOCs < 1 g/l*.
- Biodegradable to 97%* in 28 days.

CONTAINERS

20 Kg buckets.

TECHNICAL DATA

Physical state at 20 °C	: Viscous liquid
Appearance	: Beige
Odour	: Characteristic
pH	: 10 ± 0.5
Boiling point [°C]	: Not applicable
Density	: 1.23 ± 0.05
Solubility in water [vol/vol]	: Total
Flash point [°C]	: Not applicable

HOW TO USE

- Ready to use product; apply neat.
- Carry out a preliminary test on a small hidden portion of the substrate.
- Wet the surface with water beforehand.
- Apply the product in uniform layers from the bottom to the top of the surface.
- Allow the product to act for 5 to 12 hours, depending on the degree of soiling. It is possible to leave the product to act overnight and strip the next morning.
- Do not let the product dry. If the product dries before the end of the action time, moisten the façade with water before rinsing.
- Rinse the surface with a high pressure cleaner, with hot water for more efficiency
- If necessary, repeat the operation on heavily soiled areas.

APPLICATION TOOLS

Apply with a roller or a brush.



PREVENTION

To prevent future soiling, it is recommended to protect the surface with a protection treatment from the ImperGuard® or ProtectGuard® range.

COVERAGE

The following values are for guidance only:

2 to 4 m² / Kg.

CLEANING YOUR EQUIPMENT

Tools and equipment should be cleaned with water immediately after use.

STORAGE

- Store in a dry place at a temperature of between 5°C and 30°C.
- Shelf-life: 48 months from date of manufacture, in original unopened can.

RECOMMENDATIONS

- Protect fragile materials (special glass, alloys, etc.).
- Always carry out a test beforehand to check compatibility.
- For best results it is essential that product is used when the temperature of the substrates is between 5°C and 30°C.
- Do not apply during rain or in very hot weather.
- Air temperature between 5°C and 30°C.

HEALTH AND SAFETY

- Breathing protection: No breathing protection equipment is required under normal use conditions with suitable ventilation.
- Hand protection: Wear suitable protective gloves (EN 374-1:2003).
- Skin protection: Wear waterproof protective clothing.
- Eye protection: Wear protective goggles in accordance with NF EN166.
- In case of ingestion: Do not induce vomiting. Contact a doctor or specialist.

PRODUCT FOR PROFESSIONAL USE

TECHNICAL SUPPORT

GUARD INDUSTRY

695B Rue de l'Hers - ZA de la Masquere

31750 ESCALQUENS • FRANCE

Tel: +33 (0)1.55.86.17.60 • Fax:+33 (0)1.48.58.16.89

E-mail : contactus@guardindustry.com

www.guardindustry.com

Important: The content of this documentation is based on our experience with the product. Guard Industry guarantees the quality of its products but expressly disclaims all liability if the user does not follow the recommendations and conditions of use of the products, especially but not exclusively in the case of faulty application, application by untrained personnel, use of products not compatible with Guard Industry products, or adverse weather conditions. For more information, consult the safety data sheet.

For the most recent version of our data sheet, visit our website
www.guardindustry.com

Last updated : 25/05/2023