


KEM BITUME REMOVER®

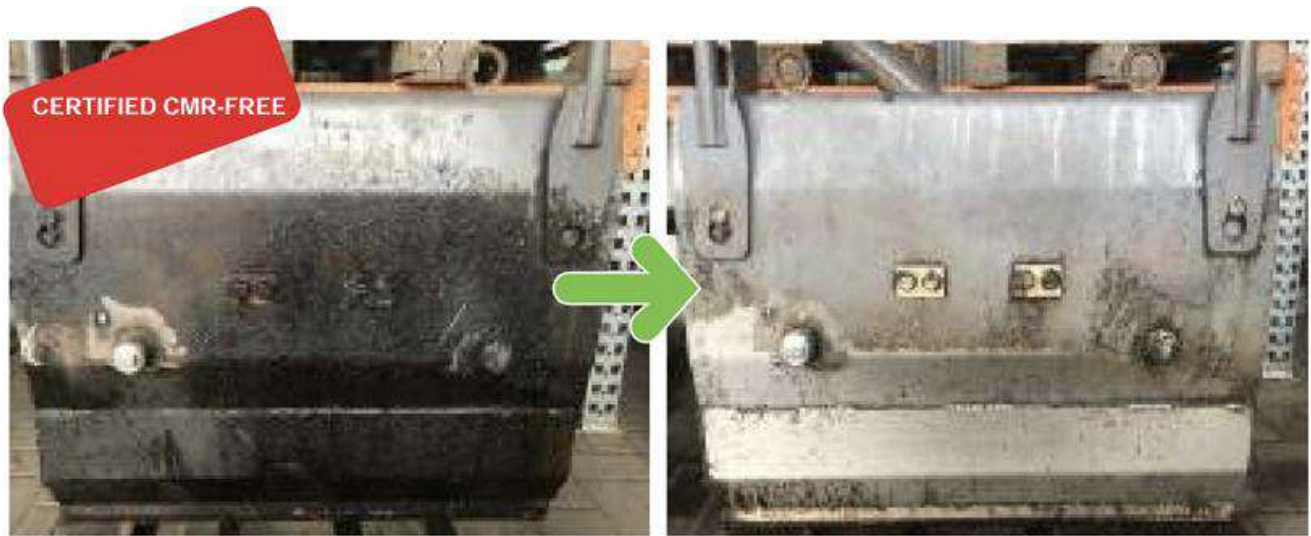

Tar remover - Debituminator and cleaner FOR CONSTRUCTION EQUIPMENT

- STRIPES AND CLEANS
- HIGH EFFICIENCY
PERFORMANCE EVEN IN COLD
- NON-CORROSIVE AND NON-HARMFUL

- BIO-BASED FORMULA WITH
100% OF ORIGINAL INGREDIENTS
VEGETABLE
- ODOR-FREE AND VOC-FREE*

DESCRIPTION

KBR® is a bitumen stripper for cleaning all equipment used in building and public works.

KBR® is a new generation product formulated with plant-based ingredients and designed for use on cold bitumen. It has been developed to meet the various requirements of applicators in terms of safety during application, effectiveness, environmental impact, and protection of treated surfaces.

KBR® is an excellent bituminous remover for asphalt plants, gravel spreaders, pavers, tippers, hand tools and all other construction equipment.

KBR® also allows you to remove traces and residues of grease, oil, heavy fuel oil, glues, etc.

USE

KBR® can be used in many fields including DDE, TP, BTP, asphalt plants, maintenance services, roadworks, industry, oil and maritime sectors...

ADVANTAGES AND FEATURES

- Powerful paint stripper, fast acting.
- Works on cold bitumen (down to -15°C).
- Non-corrosive and non-irritating.
- Plant-based and biodegradable formula.
- No risk to the environment.
- Easy and quick to implement.
- Ready to use.

PACKAGING

25L containers.
220L drums.
1000L tanks.

ENVIRONMENT

Environmentally friendly and ecological: • Raw materials sourced from 100% renewable plant-based resources.

- Non-corrosive, non-irritating and non-toxic.
- Biodegradable at over 80%* .
- VOCs < 1 g/l* .

TECHNICAL DATA

Physical state at 20 °C	Liquid:
Color	Amber
Odor	: Neutral
pH	: 6.70 +/-0.5
Boiling point	251 °C
Density	: 0.89 ± 0.02
Water solubility [vol/vol]	Emulsifiable
Flash point [°C]	: 95°C
VOCs	< 1 g/l*

IMPLEMENTATION

- It is essential to carry out preliminary tests.
 - Use the product undiluted, do not dilute.
- Application by spraying: _____
- Apply a first coat using a low-pressure sprayer.
 - Leave to act for 15 to 20 minutes. •
Apply a second coat.
 - Leave to act again for 20 minutes at several hours.
 - Rinse the entire surface thoroughly using a hot water pressure washer if possible.

Application by dipping: _____

- Soak the parts or tools for 10 to 60 minutes in the bath.
- Rinse thoroughly using a high-pressure cleaner.

APPLICATION TOOLS

Apply with a low-pressure sprayer or by soaking.



CONSUMPTION

The values below are given for guidance purposes only:

8 to 10 m² / L.

EQUIPMENT CLEANING

Clean tools and equipment used with water immediately after use.

STORAGE

- Store in a dry place at a temperature between 5°C and 30°C.
- Storage: 24 months from the date of manufacture, in unopened original packaging.

PRECAUTIONS FOR USE

- Wear protective gloves, clothing and goggles.
- For cleaning all painted surfaces, test first due to the fragility of some paints. • Do not allow the product to dry. Always rinse surfaces thoroughly after application.
- Do not dilute or mix with any other product.
- For perfect application, KBR® must be used when the temperature of the substrates is between 5°C and 30°C.
- Do not apply in rainy weather or very hot conditions. Air temperature between 5°C and 30°C.
- Environmental protection and packaging: dispose of empty packaging at a waste disposal center. Never throw packaging into nature.

* Calculated based on substance data.

HEALTH / SAFETY

For intensive use, refer to section 8.2 of the safety data sheet.

- Respiratory protection: No respiratory protective equipment is required under normal conditions of use.
- Hand protection: Wear chemical-resistant gloves (neoprene, PVC...).
- Skin protection: Wear long-sleeved protective clothing. • Eye protection: Wear protective eyewear. _____
- If swallowed: Do not induce vomiting. Contact a doctor or emergency room.
specialist.

FOR PROFESSIONAL USE ONLY



TECHNICAL ASSISTANCE

GUARD INDUSTRIE

695B Rue de l'Hers - ZA de la Masquere - 31750 ESCALQUENS
Tel: 01.55.86.17.60 • Fax: 01.48.58.16.89

Email: info@guardindustrie.com • www.guardindustrie.com

Important: The content of this documentation is based on our experience with the product. Guard Industrie guarantees the quality of its products but expressly disclaims all liability in the event of failure by the user to comply with the recommendations and conditions of use of said products, including but not limited to cases of improper application, application by unqualified personnel, use of products incompatible with Guard Industrie products, or adverse weather conditions. For more information, please refer to the safety data sheet.

Consult the latest update of our technical datasheet available on our website www.guardindustrie.com

Last updated: 01/10/2025